

Deep UV LED Package (SCF35BUC00D1Z1)

Product Introduction

Sanan SCF35BUC series deep ultraviolet packaging products are specially designed for applying with high radiation power and directivity requirements. The package surface mount device is made of special ultraviolet glass with optimized life time and performance of the product.

Features & benefits


- I Customized emission wavelength
- I Industry standard 3.5mm x 3.5mm ceramic package
- I Wide viewing angle >130°
- I Standard SMD (PnP and reflow)
- I RoHS and REACH compliant

Targets Applications

- I Water/ Air/ Surface sterilization and disinfection
- I Food & Pharmaceutical Processing
- I Medical Spectroscopy
- I Florescence analyzer
- I Horticulture lighting

Product Nomenclature

The part number for Sanan SCF35BUC00D1Z1 series deep UV package products is explained as follows:

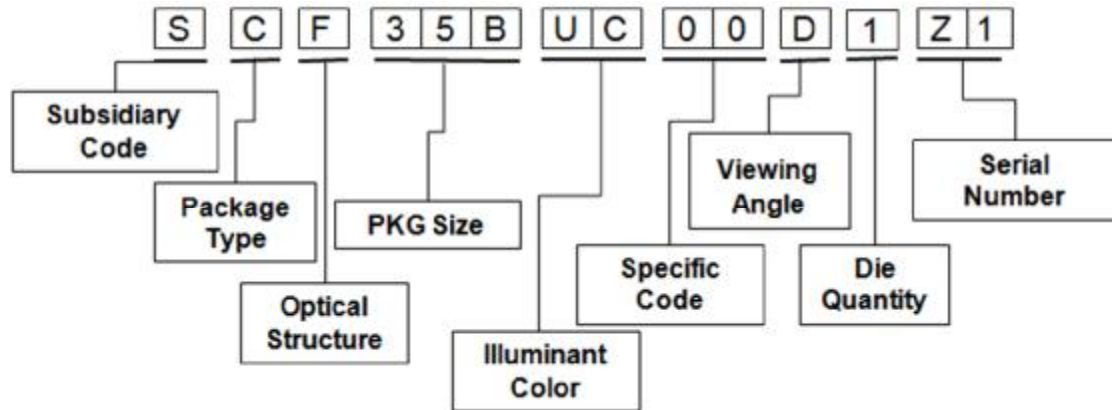

Ordering information:

Part Number: SCF35BUC00D1Z1

Specification: Refer to Bin for Wavelength & Radiant Power & Forward Voltage

275BBA002C10"

Electro-Optical Characteristics @ 40mA

Parameter	Symbol	Bin	Min.	Typ.	Max.	Unit
Peak Wavelength	λ_P	270B	270	-	275	nm
		275B	275	-	280	
Output Radiant Power	P_{opt}	BA002	2	-	4	mW
		BA004	4	-	6	
		BA006	6	-	8	
Forward Voltage	V_F	C09	4.5	-	5.0	V
		C10	5.0	-	5.5	
		C11	5.5	-	6.0	
		C12	6.0	-	6.5	
		C13	6.5	-	7.0	
		C14	7.0	-	7.5	
FWHM	$\Delta\lambda$		-	9.5	-	nm
Viewing Angle	$2\theta_{1/2}$		-	130	-	°
Thermal Resistance ($T_j - T_{sp}$)	R_{th}		-	25	-	°C/W

Notes:


1. Radiant Flux Tolerance: $\pm 10\%$
2. Forward Voltage Tolerance: $\pm 0.1V$
3. Peak Wavelength Tolerance: $\pm 1nm$
4. Viewing Angle Tolerance: $\pm 5^\circ$
5. LEDs from the above ranks will be shipped. The rank combination ratio per shipment will be decided by Sanan

Absolute Maximum Ratings


Parameter	Symbol	Max. Ratings	Units
Forward Current	I_F	100	mA
Reverse Voltage	V_R	-5	V
Operating Temperature	T_{op}	-40 ~85	°C
Storage Temperature	T_{stg}	-40 ~ 100	°C
Junction Temperature	T_j	100	°C
Soldering temperature	T_{solder}	260	°C

Optical and Electrical Characteristics Curve


Relative Radiant Power VS Forward Current ($T_a=25\text{ }^{\circ}\text{C}$)

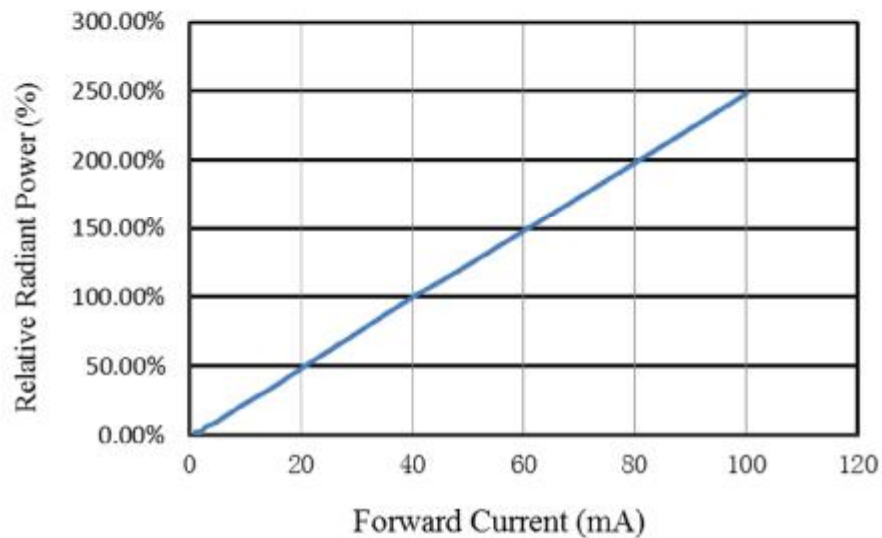


Wavelength Δ Vs Forward Current ($T_a=25^\circ\text{C}$)

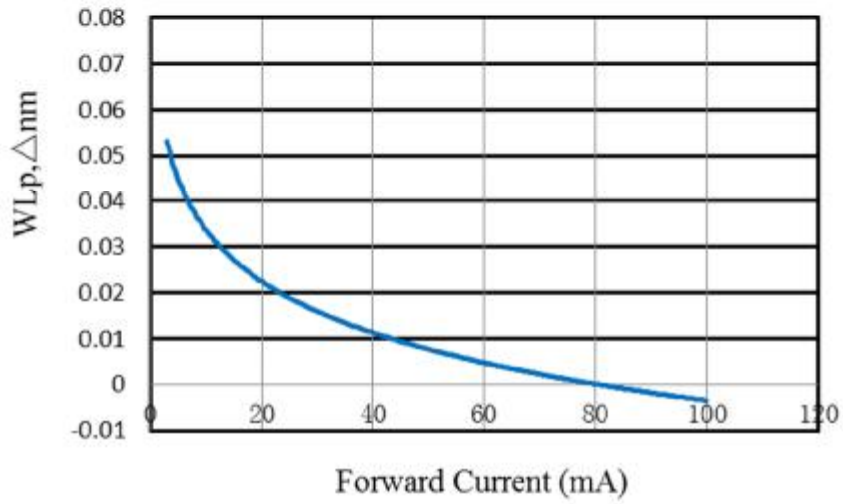


Forward Current VS Forward Voltage ($T_a=25^\circ\text{C}$)

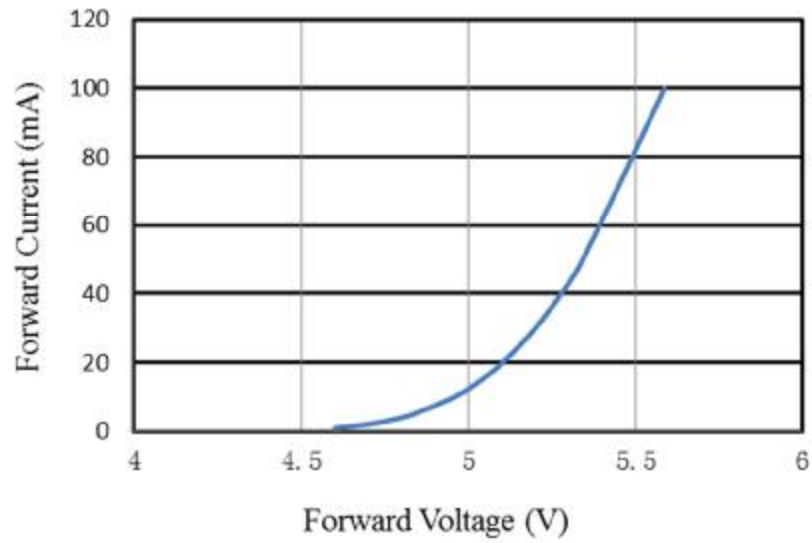


Temperature vs. Relative Radiant Power

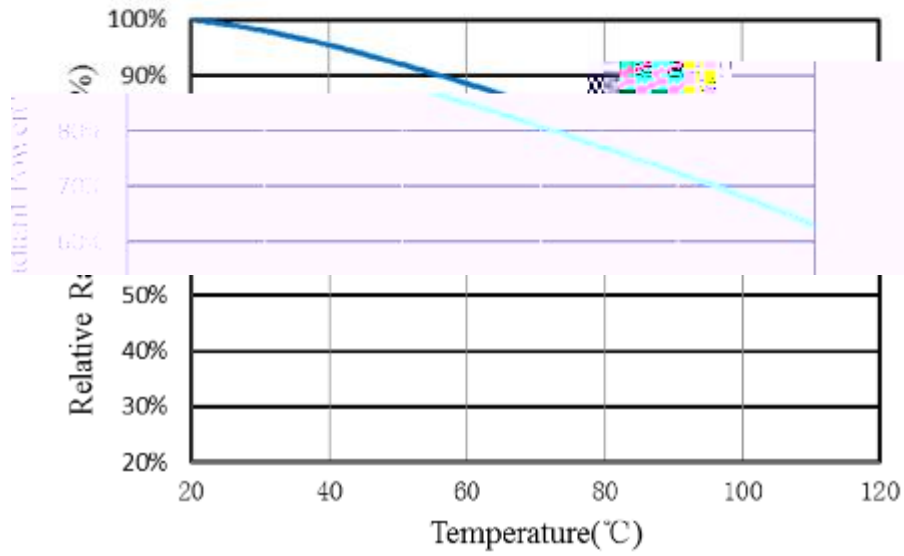


Temperature vs. Forward Voltage

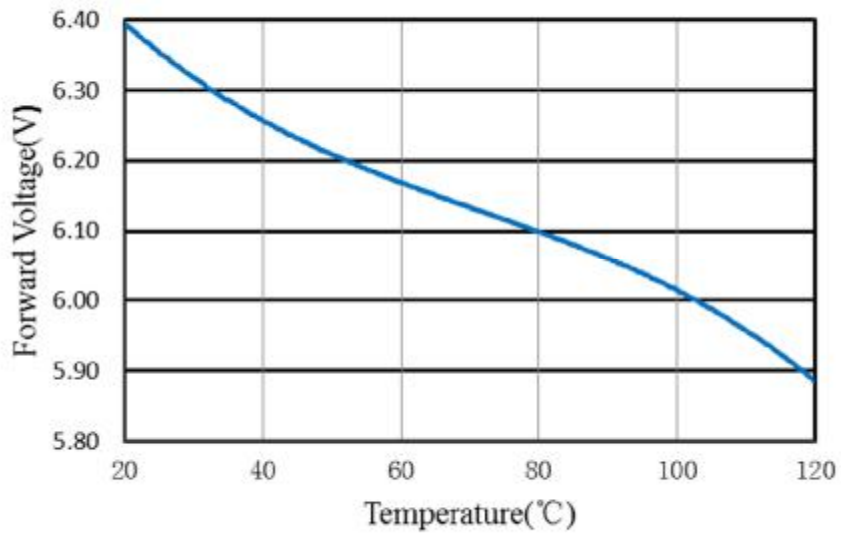


Temperature vs. Peak Wavelength

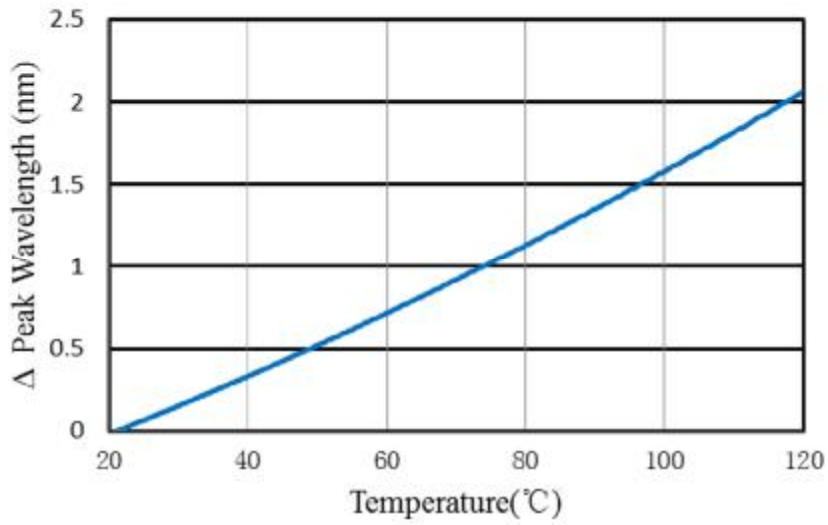


Radiation Pattern @40mA

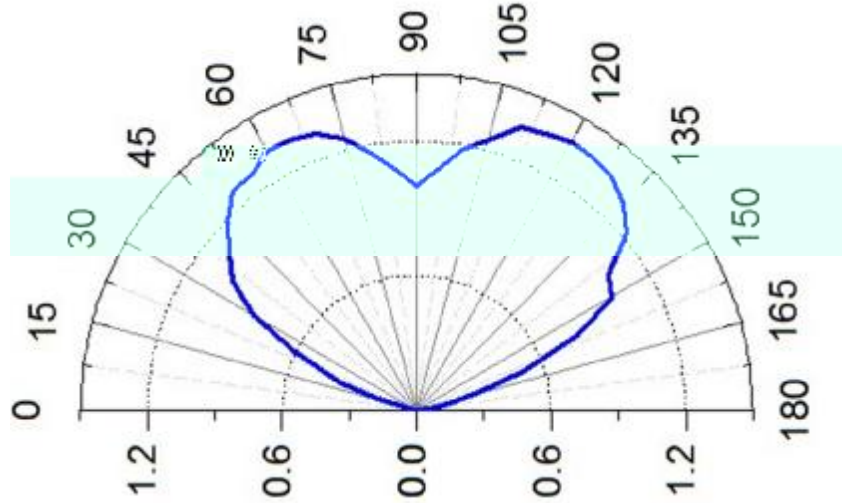

Spectrum Distribution@40mA

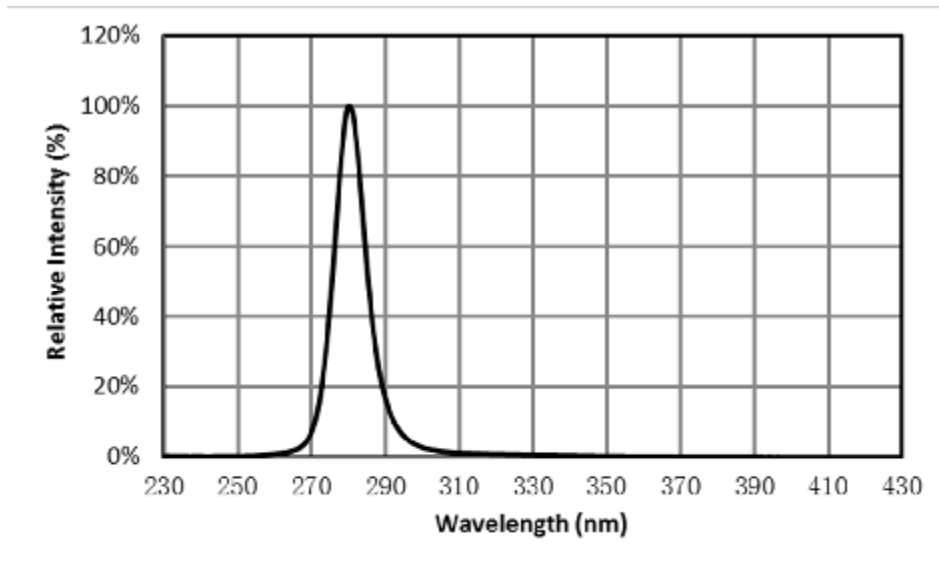


Mechanical Dimensions (Unit: mm ; tolerance +/-0.1mm):

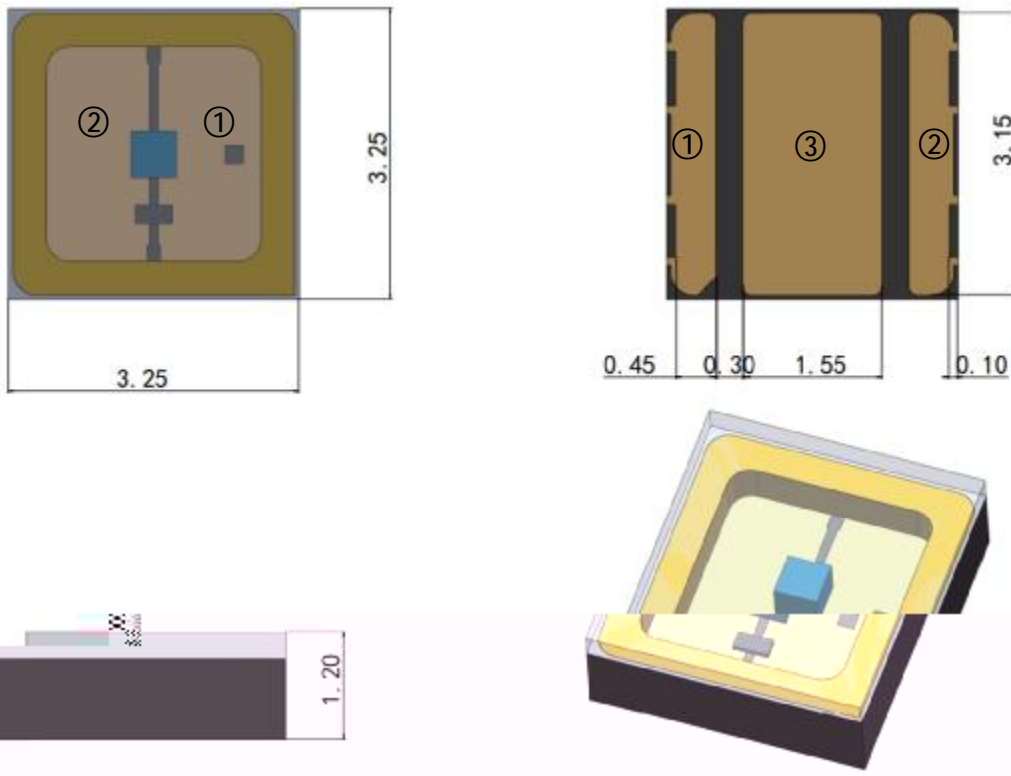

Notes : ① Cathode Pad ② Anode Pad ③ Heat Sink

Recommended Solder Pad & Stencil Pattern (Unit: mm ; tolerance +/-0.1mm):

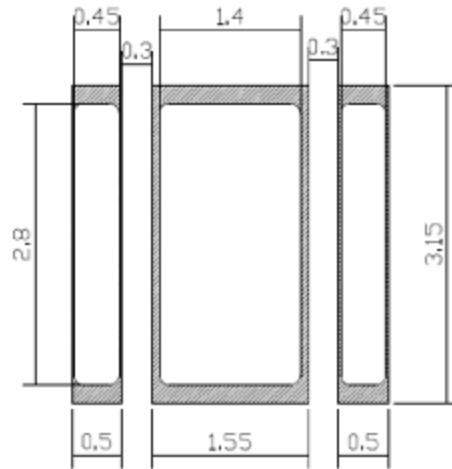


Solder Pad	3.15mm x 0.50mm
	3.15mm x 1.55mm
Stencil Pattern	2.80mm x 0.45mm
	2.80mm x 1.40 mm

Recommended Reflow Profile

As a general guideline, Sanan recommends that users follow the recommended soldering profile provided by the manufacturer of the solder paste used.

Note that this general guideline may not apply to all PCB designs and configurations of reflow soldering equipment.

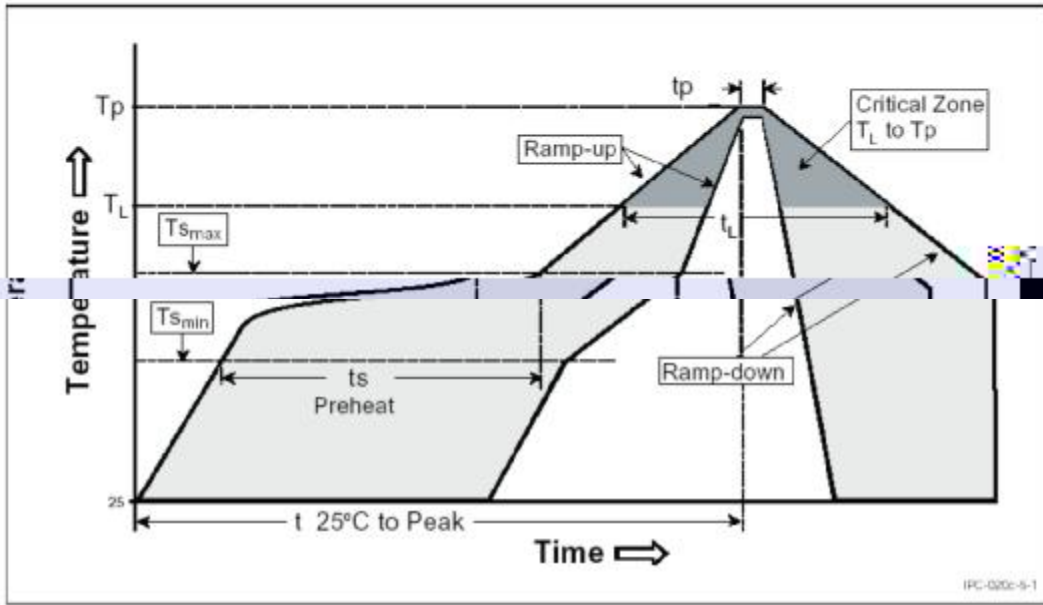

Profile Setting	Pb-Free Profile
Average Ramp-up Rate (Tsmax to Tp)	1°C/sec
Preheat Temperature Min (Tsmmin)	100-150°C
Preheat Temperature Max (Tsmmax)	180-200°C
Preheat Time (tsmin to tsmax)	60-120 sec
Liquidus Temperature (TL)	217°C
Time Maintained Above Time (tL)	50-80 sec
Peak / Classification Temperature (TP)	260°C
Time within 5°C of Actual Peak Temp (tp)	20-40 sec
Ramp-Down Rate	2-3°C/sec
Time 25°C Peak Temperature	4 min

Reliability Test

Item	Conditions	FailureCriteria
Room Temperature Operating Life	25 °C, 40 mA, 1000Hrs	Forward Voltage Vf<110% Radiant Power, Popt>70%
High Temperature Storage	100 °C, 1000Hrs	
Low Temperature Storage	-40 °C, 1000Hrs	
Temperature Cycles (100cycles)	-40 °C (30 min) ~ +25 °C (5 min) +100 °C (30 min) ~ +25 °C (5 min)	
Moisture Sensitive Level(MSL)	3 time reflow, peak temperature +260 °C, 10s Pre-conditioning: +30 °C, 60% RH for 192h	
Vibration Test	20 Hz-2000 Hz-20Hz, 200m/s ² , 4cycles, 4 min, each X, Y, Z	

Notes for storage and retrieval

UV Light

These devices are short wavelength Ultraviolet LED. During operation, the LED emits high intensity ultraviolet (UV) light, which is harmful to skin and eyes.

UV light is hazardous to skin and may cause cancer. Avoid exposure to UV light when LED is operational.

Precautions must be taken to avoid looking directly at the UV light without the use of UV light protective glasses. Do not look directly at the front or at the LED's lens when LED is operational.

Static Electricity (ESD)

Despite with built-in Zener protection diodes, UV LED are particularly sensitive to ESD (Electrostatic Discharge); static electricity and surge voltages seriously damage UV LEDs and can result in complete failure of the device. Precautions must be taken against ESD when handling or operating these devices.

Operating Conditions

In order to ensure the correct functioning of these LEDs, compliance to the typical electrical specifications is paramount. UV LEDs are particularly sensitive to any current value that exceed the max operating specifications, and will cause damage and possible complete failure to the device. The use of current regulated drive circuits are strongly recommended when operating these devices. These LEDs are susceptible to heat generation. Provide adequate thermal management to ensure LEDs do not exceed maximum recommended temperatures. Operating LEDs at temperatures in excess of specification will result in damage and possible complete failure of the device.



The following warning labels are attached to the product/system using ultraviolet.



Label Information

Sanan Optoelectronics

PN: SCF35BUC00D1Z1 Spec: 275BBA002C10
 Lot Cd: NPTU2005009 WIP ID: CS2006010001

	Min	Avg	Max	
PO:	2	3	4	[mw]
WP:	275	277.5	280	[nm]
VF:	5	5.3	5.5	[V]

I (mA) : 40

QTY: 500 